

WEIGHING SENSOR  
称重传感器

轮辐式称重FWG (SPOKE WEIGHING FWG)



- 高精度，抗干扰

High precision, anti-interference
- 体积小，安装简易


Small size, easy to install
- 适用于大吨位、紧凑空间的工业系统

Suitable for industrial systems with large tonnage and compact space
- 抗偏载，强度高

Anti-biased load, high strength
- 耐高温，耐疲劳

High temperature and fatigue resistance

订货型号 (ORDER TYPE)

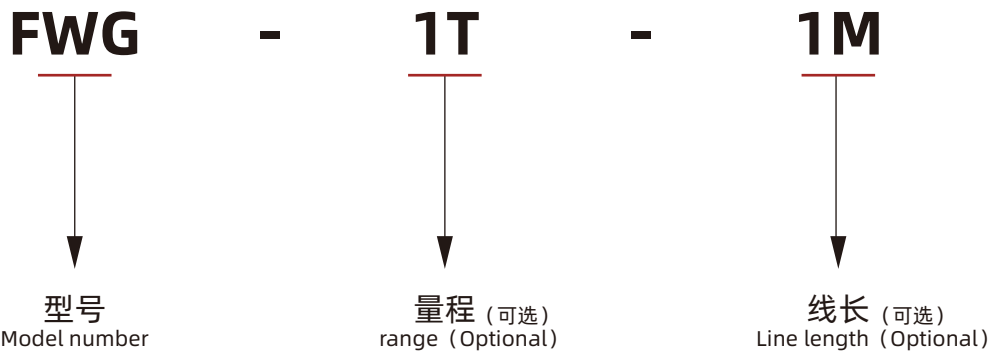

技术参数 (TECHNICAL PARAMETER)

型号参数 (Type parameter)	FWG
额定量程 (Rated range)	1T、2T、3T、5T、10T
额定激励电压 (Rated driving voltage)	5-12VDC
精度 (Precision)	≤0.03%F.S.
灵敏度 (sensitivity)	Max. 2.0±1%mV/V
非线性误差 (Nonlinear error)	Max. ≤0.05%F.S.
滞后误差 (Lag error)	Max. ≤0.05%F.S.
零点温度影响 (Zero temperature effect)	Max. 0.02%F.S./10℃
灵敏度温度影响 (Sensitivity temperature effect)	Max. 0.02%F.S./10℃
工作温度范围 (Operating temperature range)	-20℃ ~ +80℃
安全负载 (Safe load)	150%F.S
防护等级 (Class of protection)	IP65
材质 (material)	不锈钢 (Stainless steel)
电缆 (cable)	1m
可定制 (customizable)	线长可按需定制 (Line length can be customized)

★ 图示尺寸仅供参考，详情请查询使用手册

