

DISPLACEMENT DIGITAL DISPLAY TABLE

位移数显表

◎ M601



- 单轴数显，RS485通讯输出

Single axis digital display, RS485 communication output
- 可选毫米mm/英寸inch/角度°

Optional mm/inch/ Angle
- 可选直线测量/角度测量


Optional line measurement/Angle measurement
- 外接磁栅/光栅传感器

External magnetic gate/grating sensor
- 断电记忆保存

Power-off memory preservation
- 多段线性补偿

Multistage linear compensation

◎ 订货型号 (ORDER TYPE)

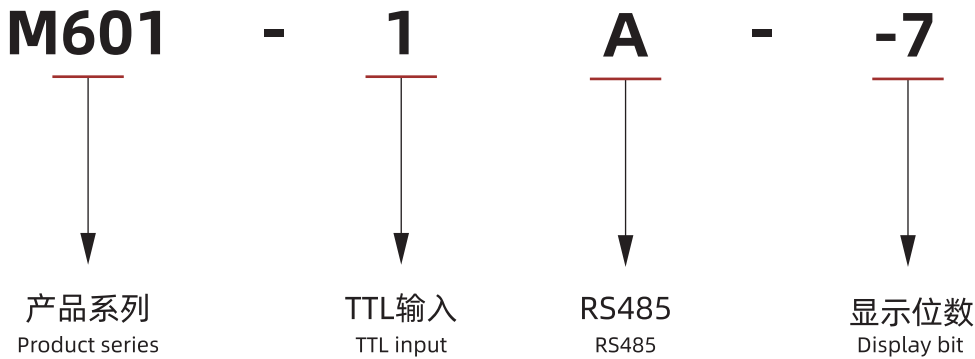

◎ 技术参数 (TECHNICAL PARAMETER)

型号参数 (Type parameter)	M601
配套输入 (Matching input)	磁栅传感器，光栅传感器 (Magnetic grid sensor, grating sensor)
工作电压 (Operating voltage)	9 - 24 V DC
电流消耗 (Current consumption)	Max.65mA
分辨率 (Resolution)	0.001、0.002、0.005、0.01、0.02、0.025、0.05、0.1mm
显示范围 (Display range)	-1999999 ~ 1999999
计数频率 (Counting frequency)	Max.500KHZ
输入信号 (Input signal)	TTL
开口尺寸 (Opening size)	92×66mm
外壳结构 (Shell structure)	嵌入式套件 (Embedded kit)
工作温度 (Operating temperature)	0℃~ +60℃
存储温度 (Storage temperature)	-20℃ ~ +70 ℃
防护等级 (Class of protection)	数显表 IP40 (Digital display meter IP40)
可定制 (customizable)	RS485通讯功能 (RS485 communication function)

